


ASSEMBLY AND INSTALLATION INSTRUCTIONS

OW3112

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

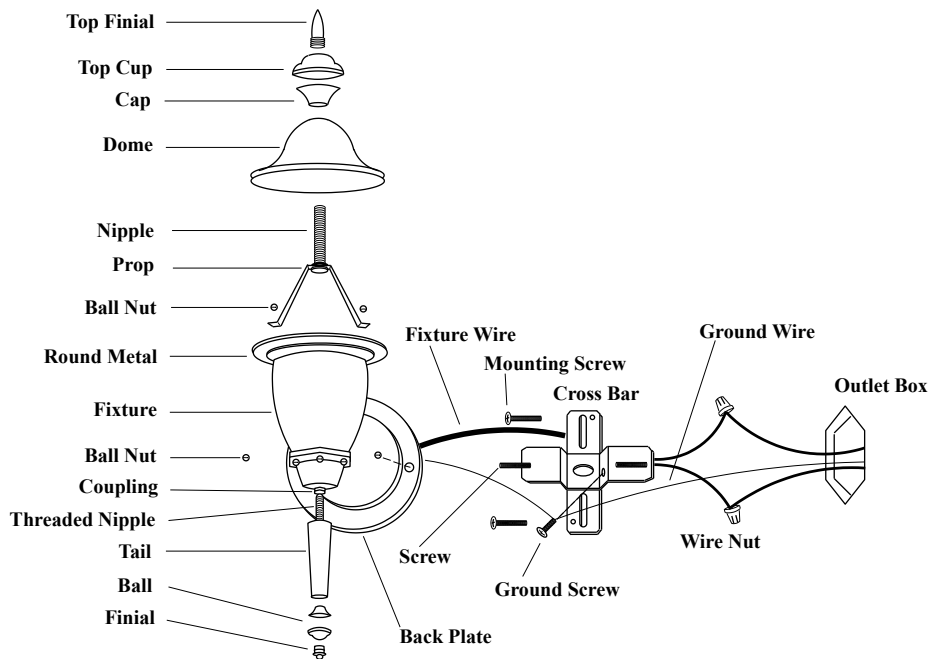

Installation Steps

1. Thread the 2 longer screws through cross bar outwards. Attach the cross bar to outlet box by screwing 2 mounting screws inwards.
2. Make wire connections:
 - Attach black wire from light to black wire from power source with wire nut.
 - Attach white wire from light to white wire from power source with wire nut.
 - Attach the ground wire and house ground wire to cross bar with a green ground screw.
3. Attach the fixture to cross bar by inserting the 2 outward screws and then secure with 2 ball nuts.
4. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the socket)
5. Remove 2 ball nuts inside of round metal, then set the prop to round metal and secure with the ball nuts.
6. Thread the dome, the cap and the top cup through the nipple and then secure with the top finial.
7. Secure the threaded nipple to the coupling of the fixture, then attach the tail and the bell to the threaded nipple, and then secure with finial.
8. Turn power on at fuse or circuit box.